

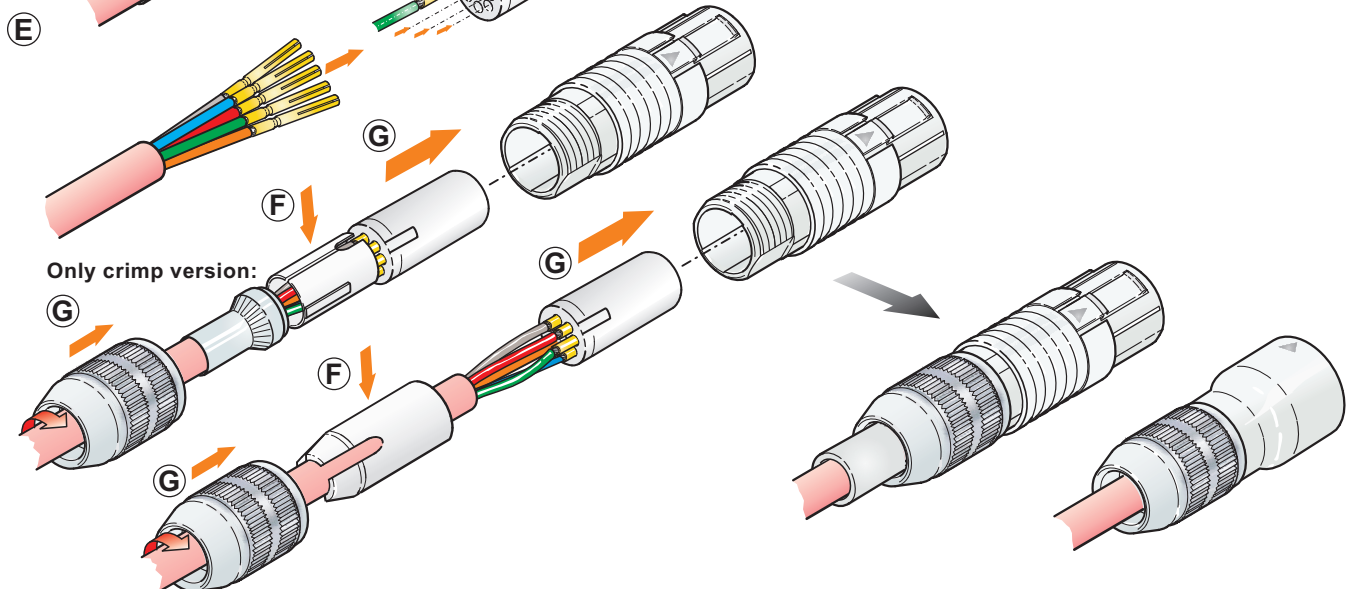
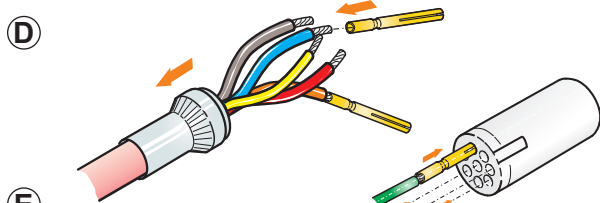


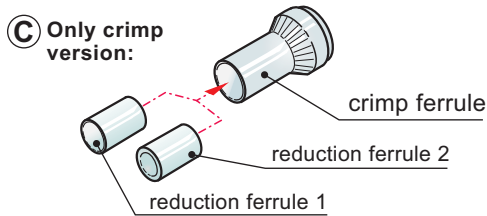

ASSEMBLY INSTRUCTION

miniCON® | Cable Connector Standard & Crimp Version

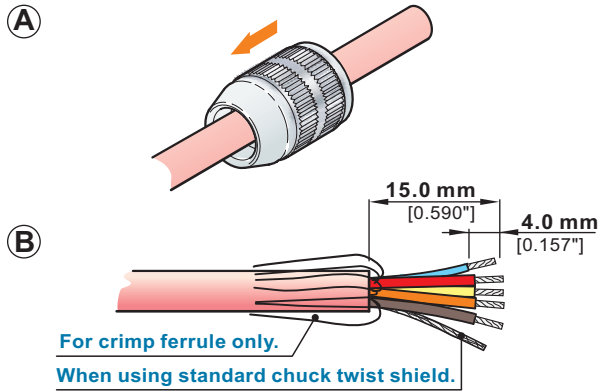

- A** Put bushing onto the cable.
- B** Prepare cable as shown.
- C** Only crimp version:
Slide crimp ferrule onto the cable.
- Crimp ferrule, only for cable O.D. 4.5 - 6.0 mm
- Crimp ferrule + reduction ferrule 1, for cable O.D. 3.3 - 4.4 mm
- Crimp ferrule + reduction ferrule 2, for cable O.D. 2.5 - 3.2 mm
- D** Wire contacts:
• Solder standard contacts.
• For crimp contact use our HX-CONTACT crimp tool with the appropriate positioner (see ordering info)
- E** Snap the contacts into the insert.
Contact Arrangement:
- Male Female
- F** Press the distance sleeve / chuck onto the cable.
- G** Slide insert and chuck into the housing and fasten the bushing.

Same procedere for MSC & MMC housing with female or male inserts!

Neutrik AG	LI	T: +423 / 237 24 24	F: +423 / 232 53 93	Neutrik France	FR	T: +33 1 / 4131 6750	F: +33 1 / 4131 0511
Neutrik USA Inc.	USA	T: +1 704 / 972 3050	F: +1 704 / 438 9202	Neutrik Tokyo Ltd.	JP	T: +81 3 / 3663 4733	F: +81 3 / 3663 4796
Neutrik (UK) Ltd.	UK	T: +44 1983 / 811 441	F: +44 1983 / 811 439	Neutrik Hong Kong Ltd.	HK	T: +852 / 2687 6055	F: +852 / 2687 6052
Neutrik Vertriebs GmbH	DE/NL/AT/DK	T: +49 8131 / 280 890	F: +49 8131 / 280 830	Neutrik India Pvt. Ltd.	IND	T: +91 / 982 05 43 424	F: +91 / 22 26163 540

Draft. Nr.: BDA 126 | Update: 09.10.2018 | Data subject to change without prior notice. © 2018 NEUTRIK®, NEUTRIK® and miniCON® is a registered trademark of NEUTRI AG. ALL RIGHTS